



Base Adapter S4/34K (S4-700-34K)

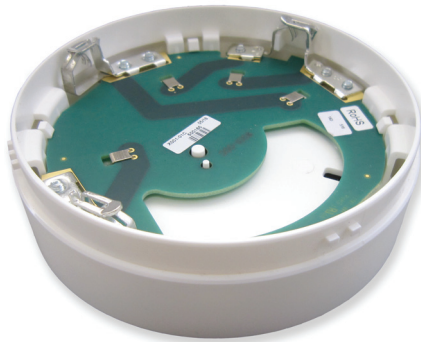

The *Base Adapter S4/34K (S4-700-34K)* allows an S-Quad Sensor to be fitted to a 34K Base. This allows S-Quad devices to function on a Vigilon loop having 34K Bases.

DO NOT fit a Base Adapter to a:

- ❑ 34K Base fitted with a Trim Ring
- ❑ 34K Base fitted in a Flush surround.



Compatibility

An S-Quad/Adapter Base assembly fitted to a 34K Base on a Vigilon loop must have Vigilon panel Cards with compatible software, see compatibility section in S-Quad leaflet 4188-1073 for further information.

Technical Data

Dimension	112mm dia. x H 35mm
Ambient operating temperature	-20°C to +54°C
Colour	White (RAL 9010)
Weight	85g
Material	ABS

1. Remove 34K Sensor head from a 34K Base




1 Turn the 34K Sensor head anticlockwise 10° to disengage and pull it out from the 34K Base.

Loop Diagnostic Tool (LDT)

Once all the S-Quad/Base Adapters are fitted to 34K Bases, the loop must be tested for integrity using the LDT.

2. Check the Contact plate inside the 34K Base


CAUTION: The Base Adapter will not fit into the 34K Base if the contact plate inside the 34K Base is in an incorrect location, see below.
If necessary adjust the Contact plate, see 1.

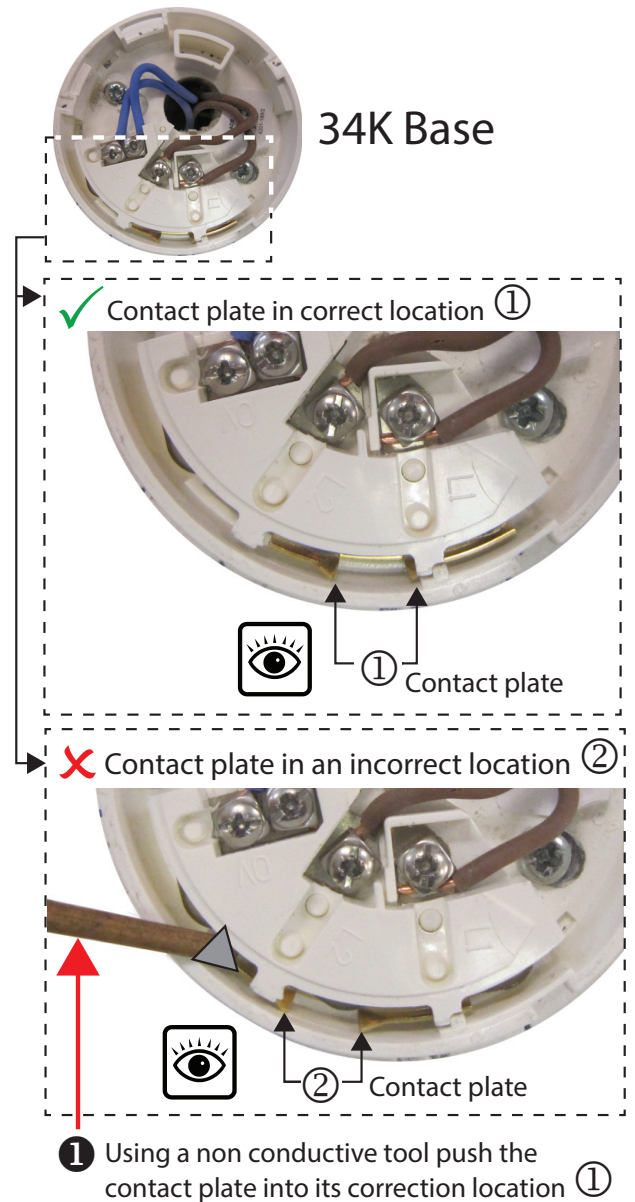


1 Using a non conductive tool push the contact plate into its correction location 1


Base Adapter S4/34K


3. Fit S4 Sensor head to a Base Adapter S4/34K

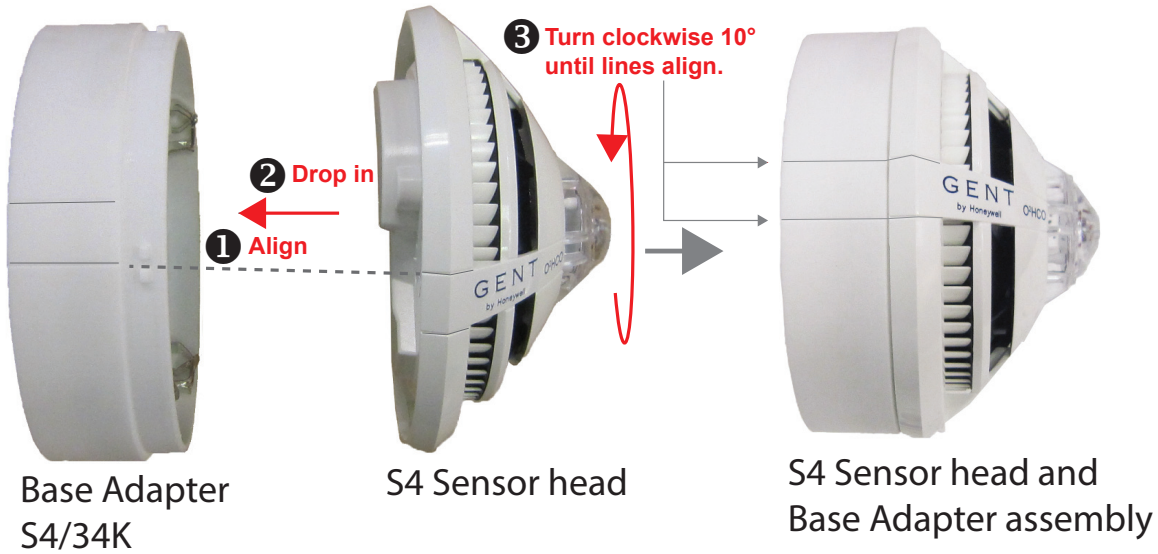

4. Fit the S4 Sensor & Base Adapter S4/34K assembly to a 34K Base

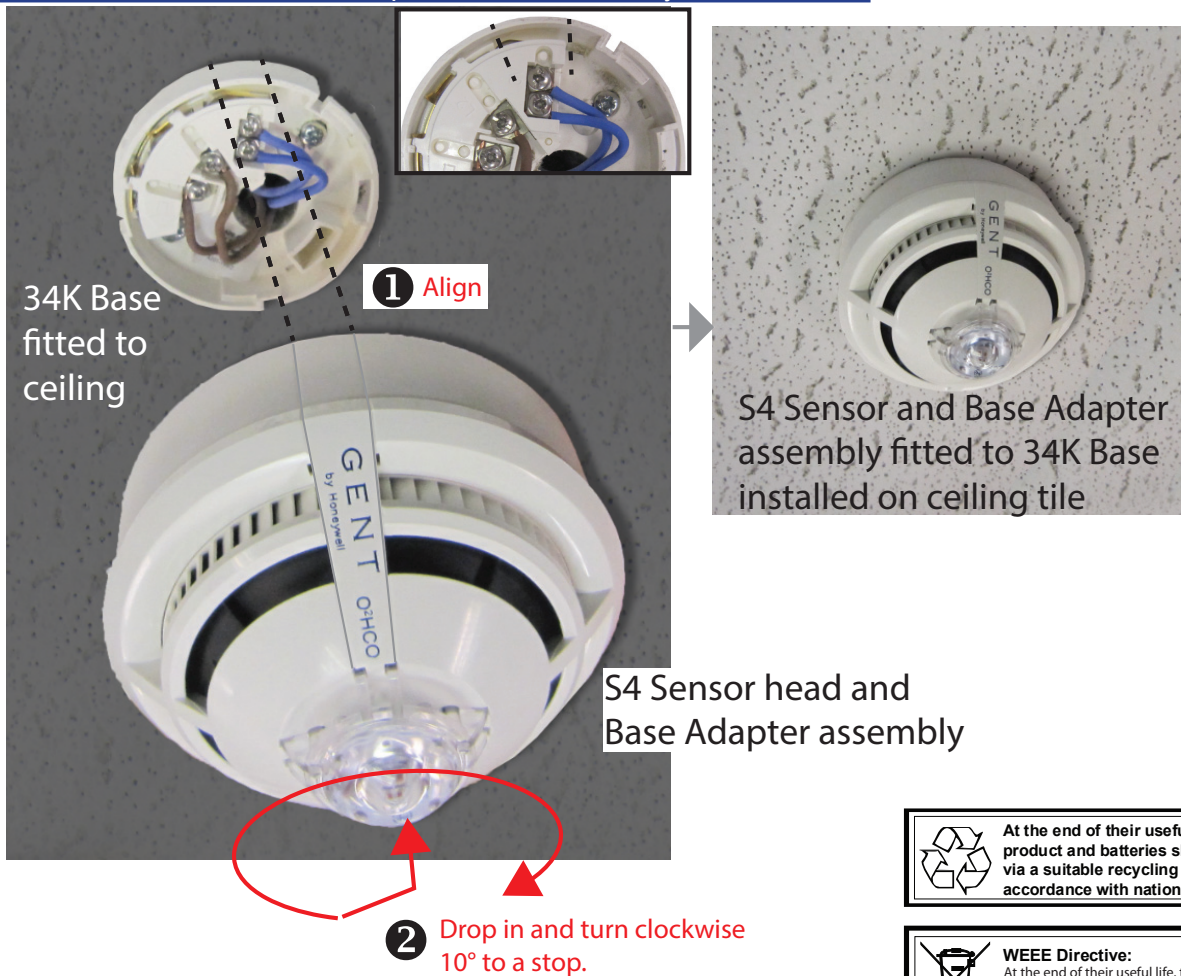

 At the end of their useful life, the packaging, product and batteries should be disposed of via a suitable recycling centre and in accordance with national or local legislation.

 **WEEE Directive:**
At the end of their useful life, the packaging, product and batteries should be disposed of via a suitable recycling centre.
Do not dispose of with your normal household waste.
Do not burn.

Honeywell Gent reserves the right to revise this publication from time to time and make changes to the content hereof without obligation to notify any person of such revisions of changes.

Honeywell
GENT

Hamilton Industrial Park, Waterside Road, Leicester LE5 1TN, UK.

Telephone: +44 (0) 116 246 2000

Tech. Support www.gentexpert.co.uk

Website: www.gent.co.uk

Fax (UK) +44 (0) 116 246 2300