

User Guide

S3 Remote Control

Honeywell
GENT

for Sounder, Speech and Strobe products

These instructions cover the Infra red **remote control** also referred to as 'handi link', product code number S3-CONTROL.

You can use the remote control to do the following on the S3 product range:

- adjust the volume level of the tone and speech message
- for conventional products only:** select different tone and speech, see data supplied with the S3 product
- save the new settings to the S3 product.

Do's and Don'ts

Do treat your remote control with care and protect it against moisture.

Don't operate the remote control unnecessarily.

How to fit the battery

The remote control is supplied with two 12V alkaline batteries.


You will need to insert one battery in the remote control and keep the spare one for future use.

The battery life is determined by the frequency of use and under normal usage the battery should last for one year.

To insert a new battery in the remote control follow steps ①②③ and ④ .




Use only the recommended 12V battery, type GP23A, MN21 or VR22.

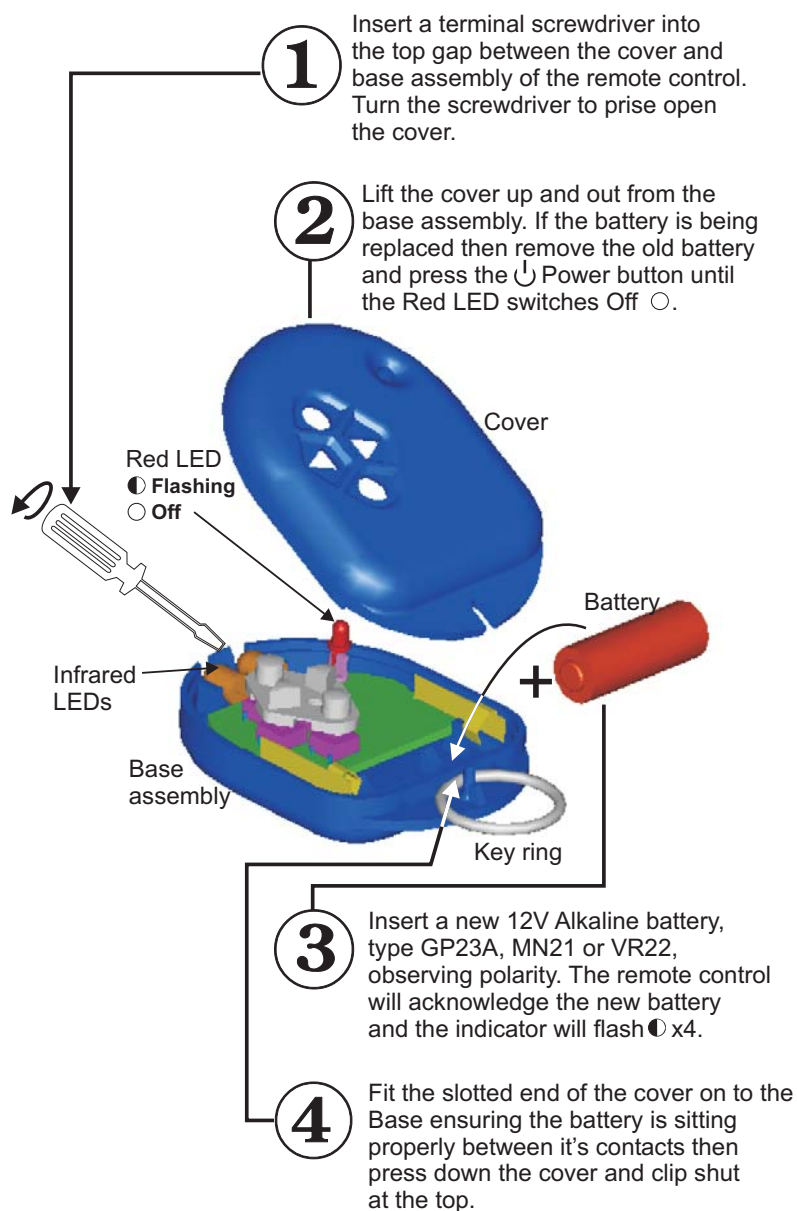

How to operate the Remote control


The remote control has an operating range of up to **3m**. To use the remote you will need to directly point the remote control to the **base** of the S³ product and follow steps ①②③ and ④.

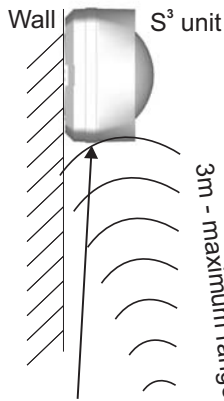

Trouble shooting
If the remote control fails to operate in close proximity to the thinned out recess of the S³ product, then a possible cause may be the battery. Replace the battery.

S³ in Addressable system
Ensure the control panel is in *Commissioning mode* before using the remote control to make adjustment to S³ products installed in the system.

Minimum volume setting
In accordance with EN54:Part 3 the remote control can normally be used to adjust the volume level of an S³ down to 65dBA at 1m.
For certain types of applications, such as in an hospital, there may be a requirement to set the volume level of an S³ below 65dBA.
To override the minimum volume setting
On the remote control: press the function button () and power up the remote control by pressing the () Power button. Now you will be able to reduce the volume down below 65dBA.

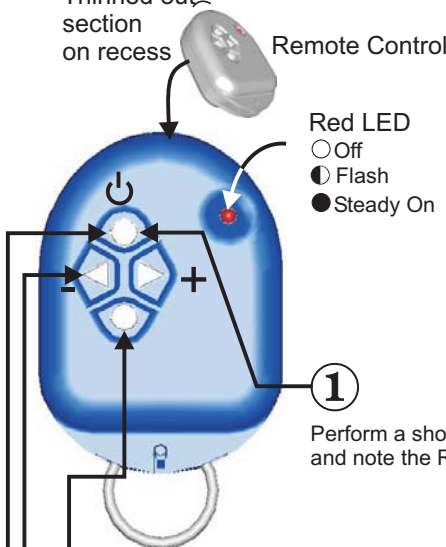

① Perform a short press on the Power button and note the Red LED flashes (circle with dot)x1 every 2 seconds

② Press the function button to toggle between:
Volume function and note the Red LED flashes (circle with dot)x1 every 2 seconds
Tone function and note the Red LED flashes (circle with dot)x2 every 2 seconds

③ Press the (right triangle) + button to increase **volume** or to select the next **tone**
Press the - (left triangle) button to decrease **volume** or to select the previous **tone**

Note: The strobe light on the S³ unit if fitted will flash rapidly when the volume is being adjusted using the remote control.

④ Press and hold the (power) button to save the settings and adjustments. The Red LED will remain On (circle with solid dot) whilst the button is held pressed. The data is saved to the unit when the tone/speech on the S³ unit stops briefly. Release the button on the remote control and the Red LED will switch Off (circle).

WEEE Directive:
At the end of their useful life, the packaging, product and batteries should be disposed of via a suitable recycling centre. Do not dispose of with your normal household waste. Do not burn.

At the end of their useful life, the packaging, product and batteries should be disposed of via a suitable recycling centre and in accordance with national or local legislation.

Honeywell Gent reserves the right to revise this publication from time to time and make changes to the content hereof without obligation to notify any person of such revisions of changes.

	Hamilton Industrial Park, Waterside Road, Leicester LE5 1TN, UK	Website: www.gent.co.uk
	Telephone +44 (0) 116 246 2000	Fax (UK): +44 (0)116 246 2300